






Canon

# New Product Update 1440i | BIS

Monochrome A4 Laser Multifunctional



### Major features

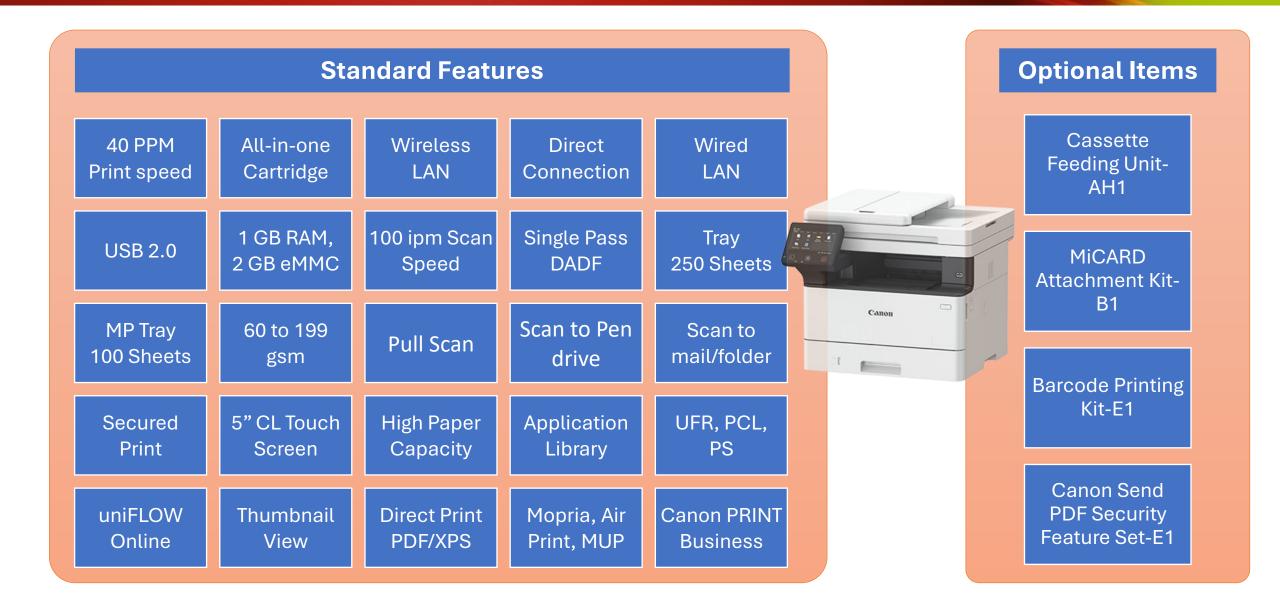


HENKAKU 2.0



### Product Highlights

HENKAKU 20

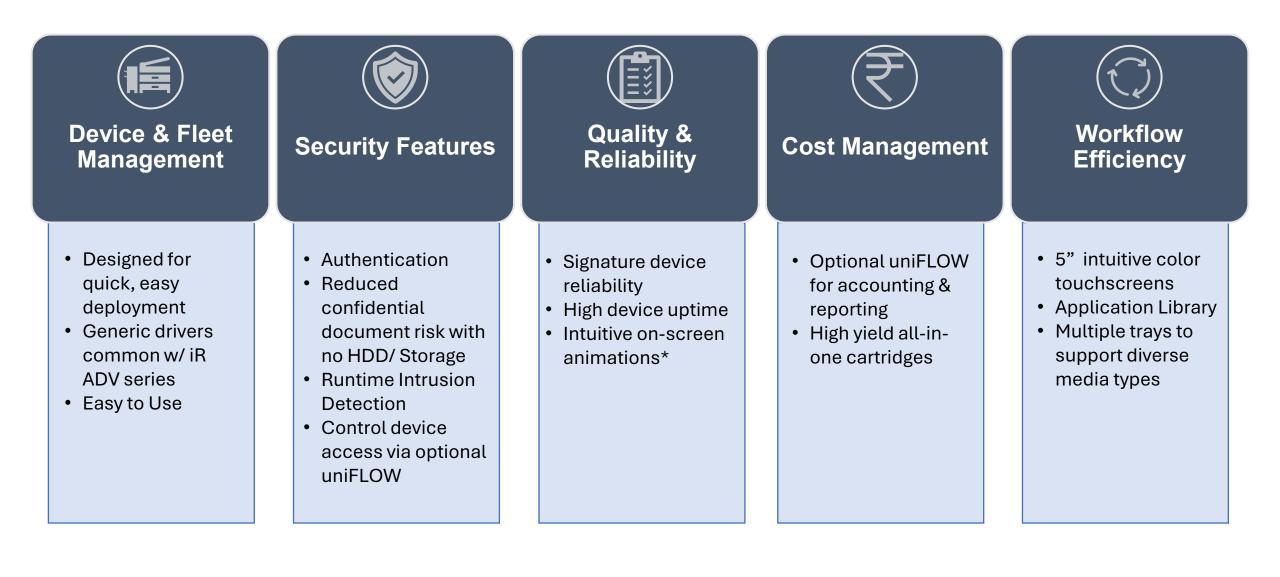





Core functions	Print, Copy, Scan, Send	
Control Panel	5 inch TFT LCD WVGA Colour Touch panel	
Memory & Storage	1GB RAM, 2 GB eMMC	
Interface Connection	NETWORK Standard: Wired (upto 1000Base-T), Wireless (IEEE 802.11 b/g/n), Direct Connection OTHERS Standard: USB 2.0 (Host) x2, USB 2.0 (Device) x1	
Memory Media	USB Memory	
Network Security	TLS 1.3, IPSec, IEEE802.1X auth, SNMPv3, Firewall Functionality (IP/MAC Address Filtering), Enabling/Disabling(Network Applications, Remote UI, USB Interface), USB Port separation from LAN	
Document Security	Secure Print, Encrypted Secure Print, uniFLOW Secure Print* <sup>1</sup> , Encrypted PDF, Device Signature PDF/XPS, Restricted E-mail/File send functions, Allow/Restrict Sending from History	
Paper Supply Capacity (A4, 80 gsm)	Standard Cassette: 250 sheets, Optional Paper Cassette: 550 sheets, Multi-purpose tray: 100 sheets Maximum: 900 sheets (with Cassette Feeding Module-AH1x1)	
Power Consumption	230V: 1320W or less	






Toner Cartridge	Toner T13 Black: 10,600 Prints (A4, Estimated Yield @ 5% Coverage)	
Supported media sizes	Std Cassette: A4, A5, A5R, A6, B5, IND-LGL, Custom size: 105.0 x 148.0 mm up to 216.0 x 355.6 mm, MP tray: A4, A5, A5R, A6, B5, IND-LGL, Index Card, Envelope*, Custom: 76.2 x 127 mm up to 216 x 355.6 mm	
Supported media weights	Standard Cassette: 60 to 120 gsm, Multi-purpose tray: 60 to 199 gsm, Duplex: 60 to 120 gsm	
Warm-up Time	From Power On: 14 Seconds or Less *	
<b>Dimensions &amp; Weight</b>	420 x 460 x 375 mm, Standard: Approx. 15.6 kg	
Usage Environment	Temperature: 10 °C to 30 °C, Humidity: 20% to 80% RH	
Print & Scan Resolution	600 x 600 dpi	
Print Speed	40 ppm (1-sided), 33.6 ppm (2-sided)	
Image Formation	24 mm OPC drum, TPD Development, Laser, Roller transfer, on-demand fixing	

#### Note:

Copy/print speeds may vary depending on paper type, paper size or paper feeding direction. The device may automatically pause or slowdown to adjust printer condition such as controlling temperature of a certain unit or limiting impact to image quality during continuous copying/printing.



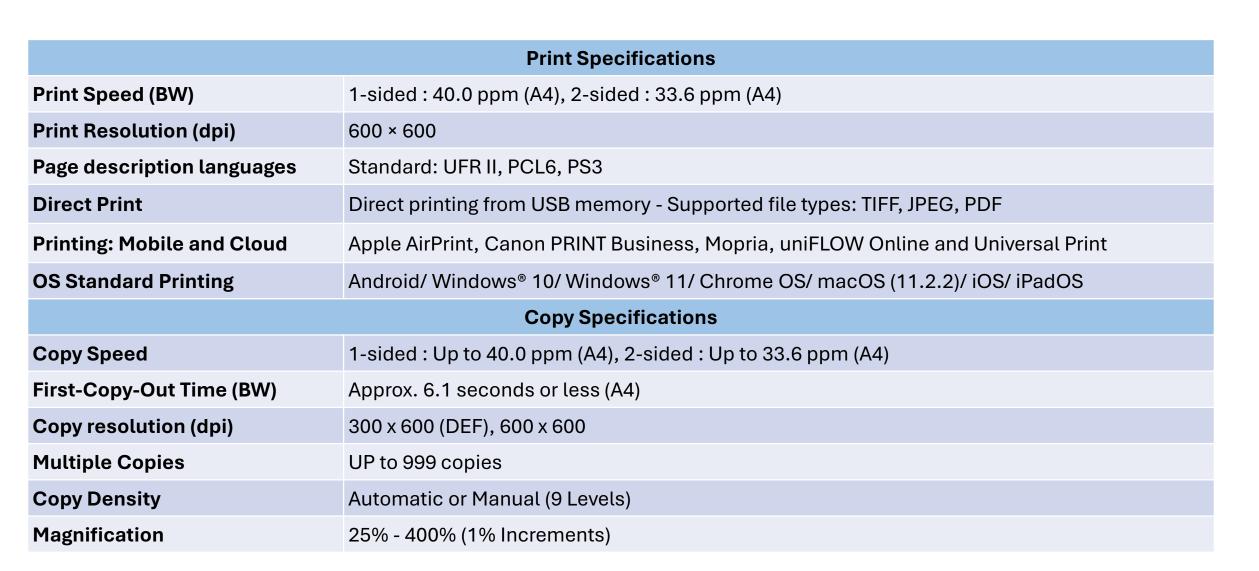





Scan Specifications		
Туре	1 PDS	
Document Capacity (A4, 80gsm)	Up to 50 sheets	
Supported media sizes	A4R, A5R, A6R, B5R, Custom size:48.0×85.0 to 216.0x355.6 mm	
Scan Speed (300 dpi, BW/CL, A4)	1-sided Scanning: 50 / 40 (ipm), 2-sided Scanning: 100 / 80 (ipm)	
Scan Resolution (dpi)	Send: (Push) up to 300 x 600, (Pull) up to 600 x 600	
Pull Scan Specifications	ScanGear MF For both TWAIN and WIA	
Send Specifications		
Destination	E-mail/Internet FAX (SMTP), SMB, FTP	
Address Book/Speed dials	LDAP (50) / Local (300) / One-touch (281)	
Send resolution (dpi)	Push: 300 x 300 (email/SMB/FTP), Pull: Max. 9600 x 9600	
Communication protocol	File : FTP (TCP/IP), SMB3.0(TCP/IP), Email/iFax: SMTP (Send), POP3 (Receive)	
File Format	Standard: TIFF, JPEG*, PDF (Compact, Searchable), Optional: PDF(Encrypted, Digital Signature)	



## All-In-One Cartridge (AIO)



ENKAKU 20

### Canon Toner T13 Black (5640C006) Standard Yield: 10,600 (A4, 5%, ISO)\*



• The estimated/std life is a reference value considering a typical office use. The actual value varies depending on the customer environment, image coverage, machine health etc.